

OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER

SECTION 8 TOWNSHIP 14 RANGE 5

DATE: 1-19-07

PARTY CHIEF: Wilcoxon

CREW: _____

TYPE OF MARKER: Harrison


METHOD OF ESTABLISHMENT: County: 10-15-02

IN. S.P.C. E ZONE NAD '83

NAME: 14050804

N: 491407.1936(m)

E: 70618.5206(m)

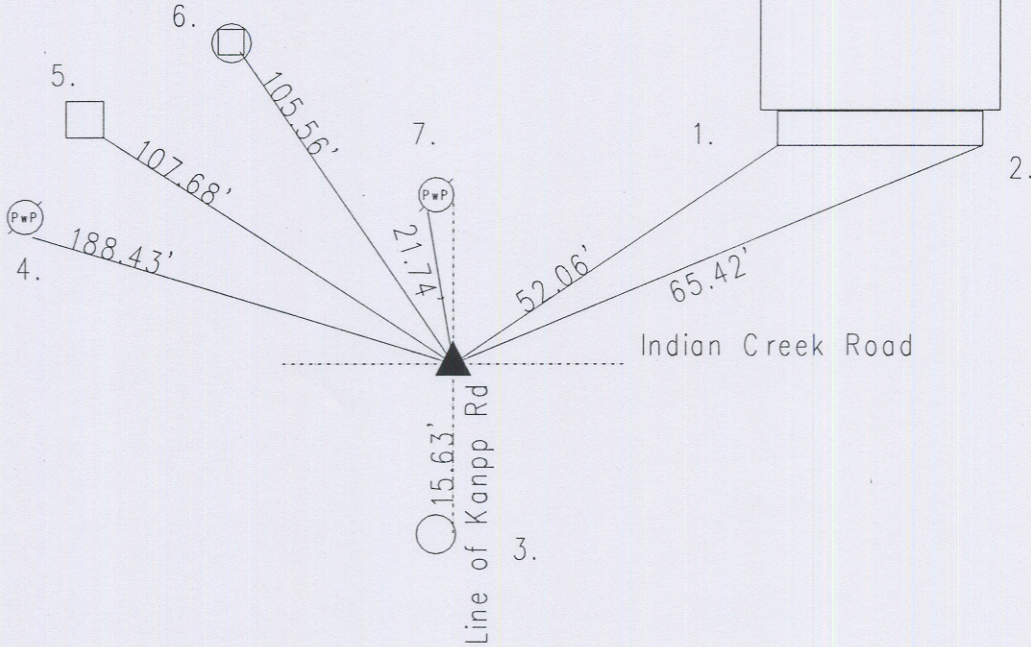

Original post set 1820 by Hendricks with witness: 16" beech N 30 E 10 links, 4" beech S 20 e 29 links per Marion County Atlas pg. 13. Hosbrook 11, 12 & 15-1850 for Sec. 6 & 7 called stone at nearly all corners per Franklin Township Legal Survey Book pg. 34. Unversaw '4-5-54 called stone. 11-14-74 called stone 2" dn. 2-7-80 called stone 6" down. Excavated 10-30-87 and stone found 8" down. Harrison set. Re-tied 10-26-98 by Kiste, Re-tied 10-15-02 by Wilcoxon. Re-tied 01-19-07 by Wilcoxon.

14050804

REF.	DISTANCE	DESCRIPTION
1.	52.06'	SW corner of house ADDRESS 9018
2.	65.42'	SF corner "
3.	15.63'	PK nail F fence post 6" up
4.	188.43'	Mag nail w/bw S PwP no# 10" up
5.	107.68'	Cut 'x' in SF corner of drain inlet
6.	105.56'	SF corner of metal top of concrete light pole
7.	21.74'	Mag nail w/bw SW PwP no# 6" up